


Short Link Chain KLFU, Grade 8

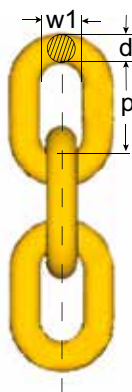

Heat treatment

Quenched and tempered,
Stress relieved


Surface treatment

Painted yellow

Not for lifting purposes

Art. no.	Code	Link dimensions (mm)			Weight kgs/m	Min. breaking load (tonnes)	Delivery length
		d nom. mm	P » mm	w1 » mm			
Z802330	KLFU-10-8	10	30	14.0	2.2	12.6	1 x 100 m
Z802331	KLFU-13-8	13	39	17.6	3.7	21.4	1 x 100 m
Z801146	KLFU-16-8	16	48	21.5	5.8	32.2	1 x 100 m
Z327377	KLFU-19-8	19	57	27.0	8.0	45.4	1 x 100 m
Z327385	KLFU-22-8	22	66	30.0	11.0	61.0	1 x 50 m
Z801505	KLFU-26-8	26	78	35.0	14.8	86.0	1 x 50 m

Mid-link Chain MLFU, Grade 8

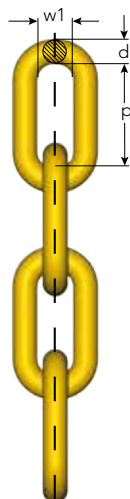

Heat treatment

Quenched and tempered,
Stress relieved


Surface treatment

Painted yellow

Not for lifting purposes

Art. no.	Code	Link dimensions (mm)			Weight kgs/m	Min. breaking load (tonnes)	Delivery length
		d nom. mm	P » mm	w1 » mm			
Z802332	MLFU-10-8	10	40	14.4	2.0	12.6	1 x 100 m
Z802333	MLFU-13-8	13	55	20.2	3.3	21.4	1 x 100 m
Z800564	MLFU-16-8	16	65	20.5	5.0	32.2	1 x 100 m
Z800476	MLFU-19-8	19	75	29.0	7.1	45.4	1 x 100 m
Z800661	MLFU-22-8	22	88	30.0	9.4	61.0	1 x 50 m
Z801770	MFLU-26-8	26	91	34.0	13.9	86.0	1 x 50 m

Long-link Chain LLU, Grade 8

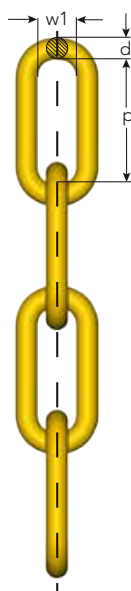

Heat treatment

Quenched and tempered,
Stress relieved

Surface treatment

Painted yellow

Not for lifting purposes

Art. no.	Code	Link dimensions (mm)			Weight kgs/m	Min. breaking load (tonnes)	Delivery length
		d mm	p mm	w1 mm			
Z801934	LLU-9-8	9	53	14.3	1.4	10.2	4 x 100 m
Z801935	LLU-11-8	11	64	18.5	2.1	15.4	4 x 100 m
Z801936	LLU-13-8	13	80	21.1	2.9	21.4	3 x 100 m
Z802160	LLU-16-8	16	100	27.0	4.6	32.2	1 x 100 m
Z601983	LLU-19-8	19	100	27.0	6.5	45.4	1 x 100 m
Z700526	LLU-22-8	22	120	35.0	8.7	61.0	1 x 50 m